


AMG FRP Fiberglass Jackets

AS MANUFACTURED BY RIVERBEND FIBERGLASS 

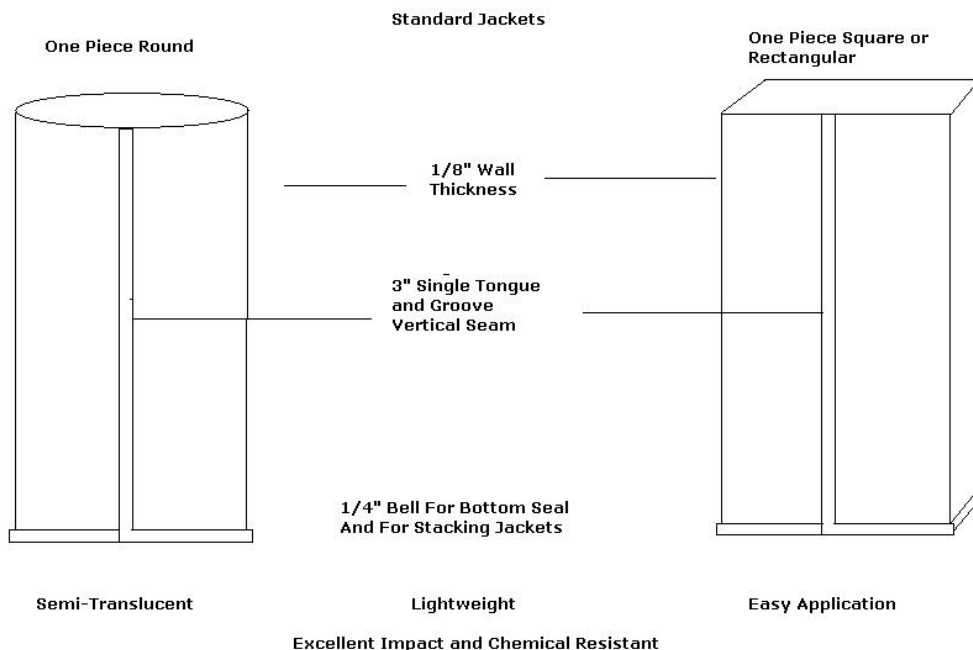

PHYSICAL PROPERTIES

Tensile Strength- (At Break) -----	ASTM D 638-99	24,500(PSI)
Tensile Modulus (youngs)	1740000	(PSI)
Elongation At Break	2.1 %	
Flexural Strength At YieLD (Max Load) -----	ASTM D790-99	28,400 (PSI)
Flexural Modulus (Tangent)	1050000	(PSI)
Barcol Hardness - -----	ASTM D 2583-95	(48)
Izod Impact -----	ASTM D 256-00 (Method A)	(26)
Water Absorption - -----	ASTM D 570-96	(Average 0.19) 1% Max

Options:

- Colored Gel-Coating
- Wall Thickness 3/16" & 1/4" available
- Fixed Stand offs
- Collars
- UV Additive
- Bells for stacking if needed

RIVERBEND FIBERGLASS SHALL NOT BE RESPONSIBLE FOR ANY AND ALL CLAIMS FROM INJURIES OR DAMAGE OF ANY KIND FROM USE OF OUR PRODUCTS.